

CAT. No.

888-2126-NS

IEC 60309 (6H) SPLASHPROOF (IP44) PLUG, 20 AMPERE-250 VOLT (C-UL-US), 16 AMPERE 220-250 VOLT, OVE, 2 POLE-3 WIRE GROUNDING, COMPRESSION STRAIN RELIEF. BLUE. APPROVALS: (C-UL-US, OVE), OPERATING TEMP. = -25°C +80°C.

APPROVALS

C-UL-US ☒ OVE ☒


CERTIFICATIONS

CE ☒ ROHS ☒

STANDARDS

IEC 60309 6H ☒

ALL DIMENSIONS ARE IN MILLIMETERS

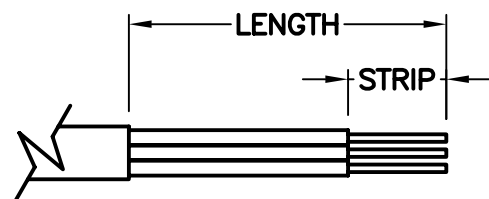


CORDAGE PREPARATION

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 15 DIA (0.591")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = N/A
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	35	16
BLUE	NEUTRAL	35	11
BROWN	LINE	35	11

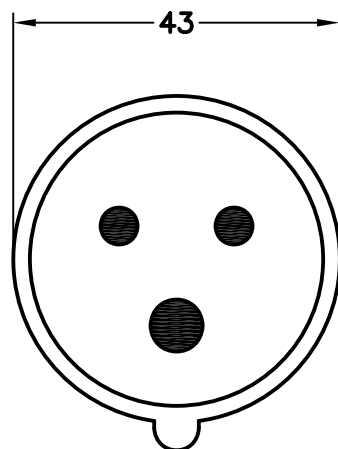IEC 60309. 6H